

# FILTERPLUS™ 650

## RODI Water Production Static System

With the capability to produce up to 5400ltr of pure water, this 650ltr Filterplus™ static system ensures that you consistently receive water of the highest purity. Say goodbye to contaminants like minerals, salts, heavy metals, and bacteria, making it perfect for spotless cleaning, aquariums, hydroponics, and laboratory testing.



FP-ST1200-01-650

### Recommended For

- ✓ Leisure Centers
- ✓ Garages
- ✓ Filling Trolleys & Tanks
- ✓ Aquariums
- ✓ Retail
- ✓ Hospitals
- ✓ Holiday Parks
- ✓ Housing Estates

### Features

#### Ample Storage Capacity

The storage tank comes with an auto shut-off feature, allowing the machine to be left running, guaranteeing a constant supply of pure water. The Filterplus™ 650ltr is designed to give you flexibility to expand your storage capacity by adding multiple tanks, side-by-side, ensuring you never run out when you need it most.

#### Compact Design

The system's compact design allows for versatile installation in various locations, saving space and ensuring it can fit seamlessly into your setup.

The 650ltr Filterplus static system has been designed to easily fit through standard doorways.

#### User-friendly Operation

Monitoring water purity has never been easier, thanks to the built-in inline TDS monitoring system.


Additionally, the operating pressure gauge provides you with precise control over the water flow. The timed transfer system with a Hiflo hose and nozzle storage simplifies the process further, making it effortless to handle. The timed motor automatically shuts off after 15 minutes run time to ensure the motor does not burn out.

The front fill point allows for convenient filling of buckets or devices like the Streamflo mini & Streamflo 25ltr.



Streamline™ Product	Fill Time
Streamflo™ Mini	20 Secs > 1 Minute
Streamflo™ 25	20 Secs - 1 Minute
Smartank™ 400	6 - 10 Minutes
Smartank™ 650 / Bravo™ 650	10 - 15 Minutes

## System Breakdown

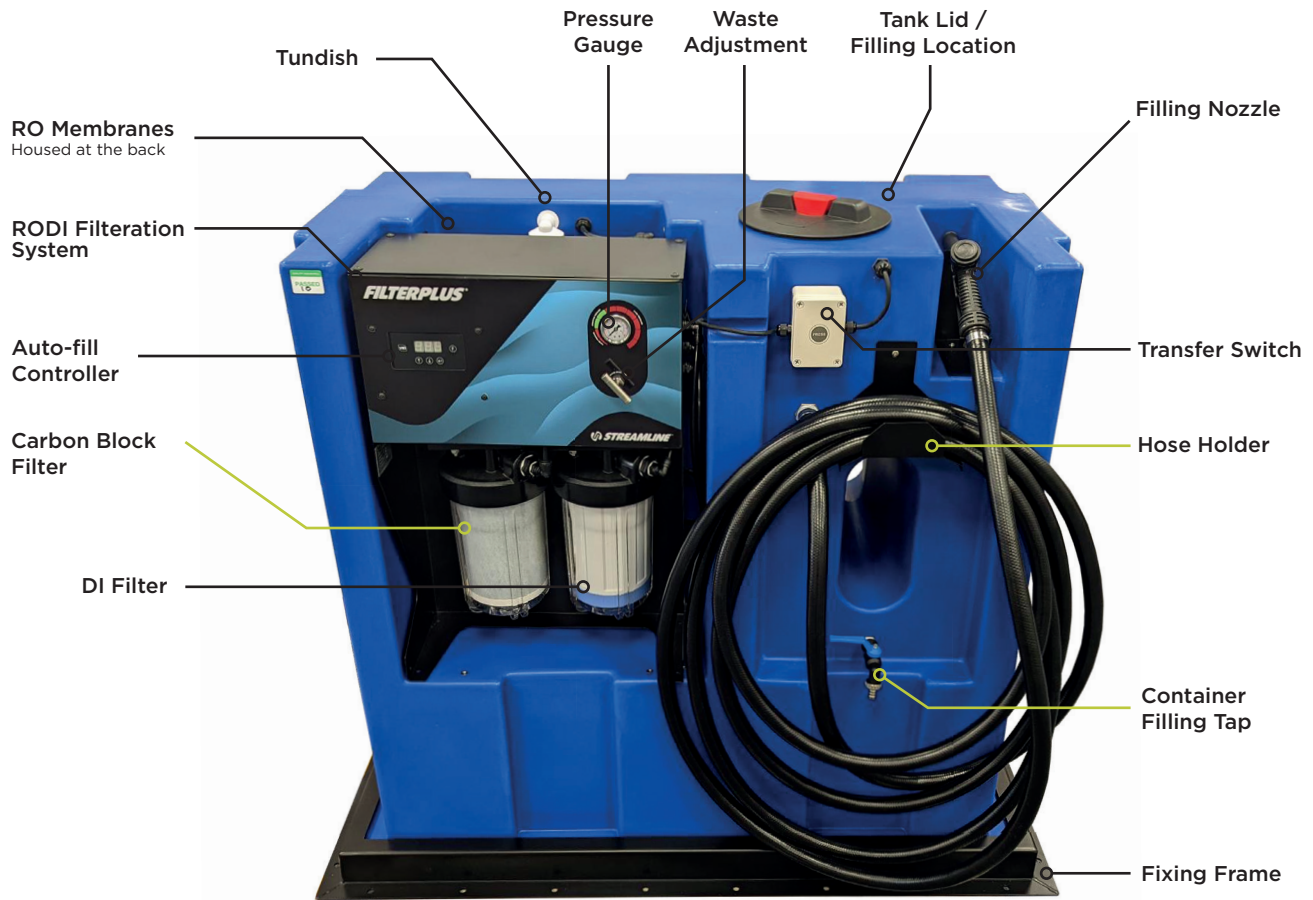

## Technical Specifications

Features	Filterplus™ 650
Country Of Origin	United Kingdom
Maximum Length	1430mm
Maximum Height	1300mm
Maximum Width	700mm
Dry Weight	125kg
Inlet Pressure Requirement	20psi
Inlet Water Flow Requirement	15lpm
Optimum Operating Pressure	100psi
Standard Water Inlet Connection	10mm
Electrical Power Supply	230v
Power Consumption	245w
Optimum Water Quality	5ppm
Pure Water Flow (Max Output)	65 lpm
Water Quality Range (inlet)	50ppm - 500ppm
Waste Rejection Ratio (Recommended)	50%
Operating Time	Constant