

HIGHLINE™ 150

High Pressure Trolley System



This versatile and rugged workhorse is designed to tackle demanding outdoor tasks efficiently. Equipped with a reliable Honda GX160 petrol engine and an Interpump triple plunger pump, it excels in commercial applications such as gutter cleaning, cladding, wall surfaces, signs, decking, patios, paths, and driveways. The compact trolley, featuring 10" flat-free wheels, ensures easy transportation to and from the site.



The machine's industrial-grade components, including a 36" heavy-duty steel chrome single lance, a 10m high-pressure twin wire rubber hose, and a chemical injector on the unloader, make it a dependable choice for day-to-day commercial use. With a variety of nozzles and robust construction, this machine guarantees smooth and reliable operation in any situation.

Features

- GX160 Honda engine, recoil start
- Interpump triple plunger pump with built-in unloader valve for smooth and reliable operation
- 36" Heavy duty steel chrome single lance with quick connector for easy nozzle changes
- 10mtr High pressure twin wire rubber hose for industrial use and longevity
- 3mtr 19mm Suction hose with weighted filter attached - for drawing from a sump
- Chemical injector on unloader with small filter attached - for drawing in detergents
- Assortment of 5 different nozzles, 15deg, 25deg, 40deg, pencil and foaming tips - for every eventuality
- Heavy duty metal trolley with 10" flat-free wheels - for robustness and great manoeuvrability.

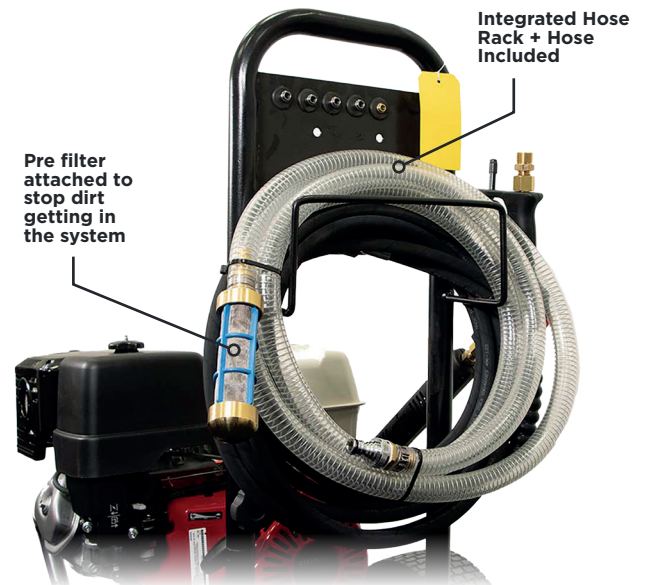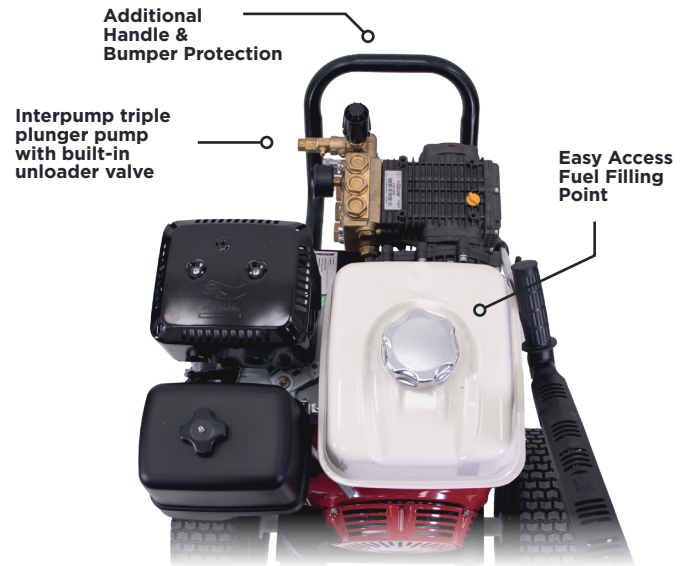

Description	Highline™ 150
Maximum Height	900mm
Maximum Length	900mm
Maximum Width	500mm
Dry Weight	45.2kg
Standard Water Inlet	3/4 Inch Male Hose Lock
Waste Water Outlet Connection	M22 Standard High Pressure Fitting
Optimum Operating Flow	12Lpm
Max Rated Temperature	60°C
Standard Water Inlet Connection	1/2 inch
Optimum Operating Pressure	150Bar / 2175psi
Engine	Petrol GX160